


### Problem with Simple Shell Example

- Our example shell correctly waits for and reaps foreground jobs
- · But what about background jobs?
  - -Will become zombies when they terminate
  - Will never be reaped because shell (typically) will not terminate
  - Will create a memory leak that could run the kernel out of memory

99

# Today Shells Signals Nonlocal jumps

			gnals
	•	mail message the s occurred in the	at notifies a process that an event of system
	Akin to exc	eptions and inte	rrupts
		the Kernel (some	etimes at the request of another
	Only inform	nation in a signal	small integer ID's (1-30) I is its ID and the fact that it arrived
	• •	,	<b>e</b> ( )
_	Only inform	nation in a signal	I is its ID and the fact that it arrived
_	Only inform	nation in a signal	l is its ID and the fact that it arrived Corresponding Event
	Only inform	Default Action Terminate Terminate	l is its ID and the fact that it arrived Corresponding Event User typed ctrl-c
	Only inform Name SIGINT SIGKILL	Default Action Terminate Terminate Terminate	l is its ID and the fact that it arrived Corresponding Event User typed ctrl-c Kill program (cannot override or ignore)

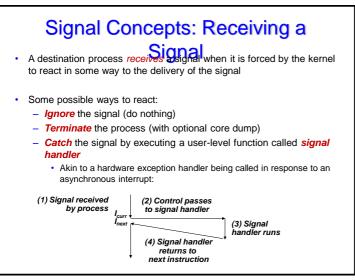

# Signal Concepts: Sending a Signal

- Kernel sends (delivers) a signal to a destination process by updating some state in the context of the destination process
- · Kernel sends a signal for one of the following reasons:
  - Kernel has detected a system event such as divide-byzero (SIGFPE) or the termination of a child process (SIGCHLD)
  - Another process has invoked the kill system call to explicitly request the kernel to send a signal to the destination process


103


### Signal Concepts: Pending and Blocked Signals


- A signal is *pending* if sent but not yet received
  - There can be at most one pending signal of any particular type
  - Important: Signals are not queued
    - If a process has a pending signal of type k, then subsequent signals of type k that are sent to that process are discarded
- A process can *block* the receipt of certain signals
  - Blocked signals can be delivered, but will not be received until the signal is unblocked
- · A pending signal is received at most once





- Kernel maintains pending and blocked bit vectors in the context of each process
  - pending: represents the set of pending signals
    - Kernel sets bit k in **pending** when a signal of type k is delivered
    - Kernel clears bit k in pending when a signal of type k is received
  - **blocked**: represents the set of blocked signals
    - Can be set and cleared by using the sigprocmask function
    - Also referred to as the signal mask.

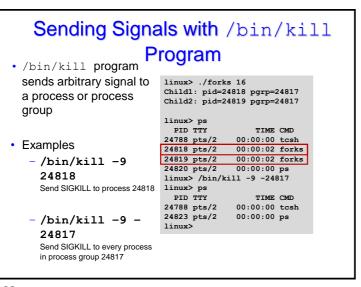

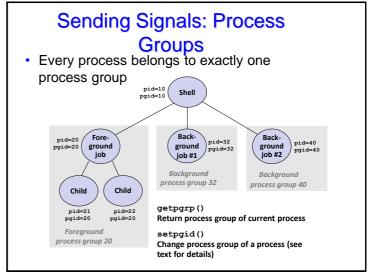


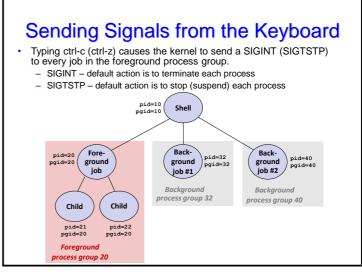


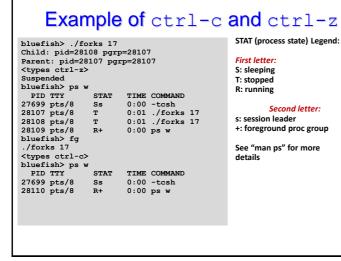


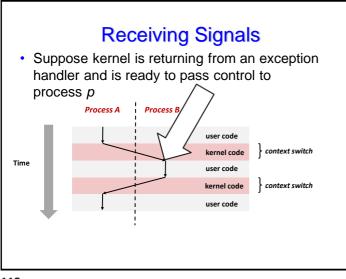


## Sending Signals with kill Function

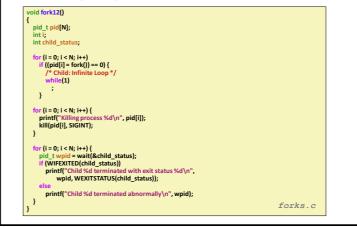

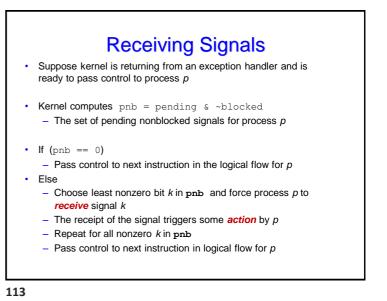

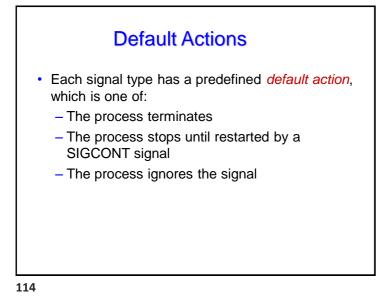

# Signal Handling Example

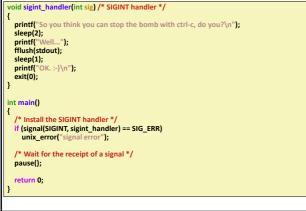


### 116

# **Installing Signal Handlers**


- The signal function modifies the default action associated with the receipt of signal signum:
  - handler t \*signal(int signum, handler t \*handler)
- Different values for handler:
  - SIG IGN: ignore signals of type signum
  - SIG DFL: revert to the default action on receipt of signals of type signum
  - Otherwise, handler is the address of a user-level signal handler
    - Called when process receives signal of type signum
    - · Referred to as "installing" the handler
    - · Executing handler is called "catching" or "handling" the signal
    - When the handler executes its return statement, control passes back to instruction in the control flow of the process that was interrupted by receipt of the signal

115

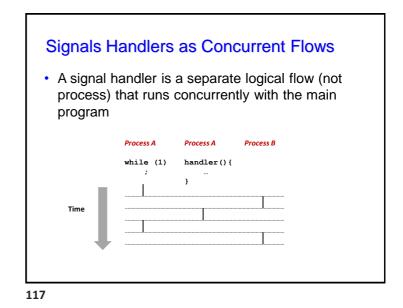

Page 6


sigint.c

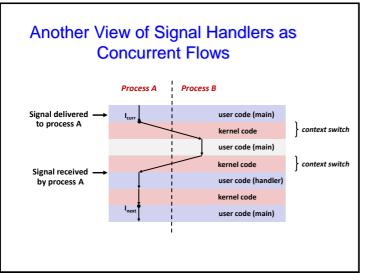

# **Blocking and Unblocking Signals**

- Implicit blocking mechanism
  - Kernel blocks any pending signals of type currently being handled
  - E.g., A SIGINT handler can't be interrupted by another SIGINT
- · Explicit blocking and unblocking mechanism
  - sigprocmask function
- Supporting functions
  - sigemptyset Create empty set
  - sigfillset Add every signal number to set
  - sigaddset Add signal number to set
  - sigdelset Delete signal number from set



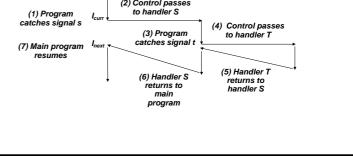

119

### **Temporarily Blocking Signals**


### sigset\_t mask, prev\_mask;

Sigemptyset(&mask); Sigaddset(&mask, SIGINT);

/\* Block SIGINT and save previous blocked set \*/ Sigprocmask(SIG\_BLOCK, &mask, &prev\_mask);

\*/\* Code region that will not be interrupted by SIGINT \*/

/\* Restore previous blocked set, unblocking SIGINT \*/ Sigprocmask(SIG\_SETMASK, &prev\_mask, NULL);

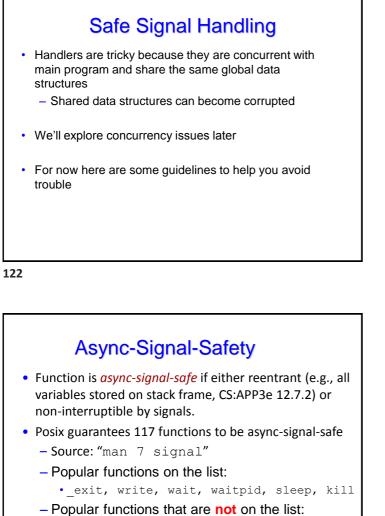

- printf, sprintf, malloc, exit
- Unfortunate fact: write is the only async-signal-safe output function

# Guidelines for Writing Safe Handlers

- G0: Keep your handlers as simple as possible – e.g., Set a global flag and return
- G1: Call only async-signal-safe functions in your handlers

   printf, sprintf, malloc, and exit are not safe!
- G2: Save and restore errno on entry and exit
   So that other handlers don't overwrite your value of errno
- G3: Protect accesses to shared data structures by temporarily blocking all signals.
  - To prevent possible corruption
- G4: Declare global variables as volatile
  - To prevent compiler from storing them in a register
- G5: Declare global flags as volatile sig\_atomic\_t
  - flag: variable that is only read or written (e.g. flag = 1, not flag++)
  - Flag declared this way does not need to be protected like other globals


123


# Safely Generating Formatted Output


- Use the reentrant SIO (Safe I/O library) from  $\tt csapp.c$  in your handlers.
  - ssize\_t sio\_puts(char s[]) /\* Put string \*/
  - ssize\_t sio\_putl(long v) /\* Put long \*/
  - void sio\_error(char s[]) /\* Put msg & exit \*/


### void sigint\_handler(int sig) /\* Safe SIGINT handler \*/


```
Sio_puts("So you think you can stop the bomb with ctrl-c, do you?\n");
sleep(2);
Sio_puts("Well...");
Sio_puts("OK. :-)\n");
_exit(0);
}
```

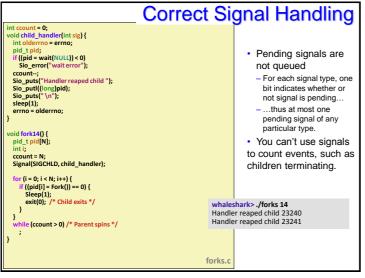


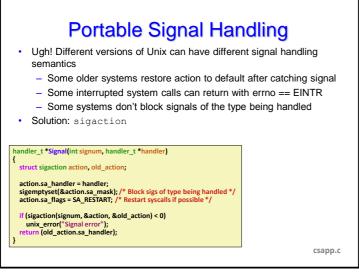


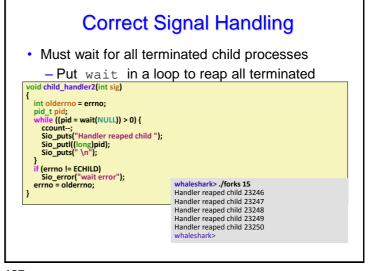


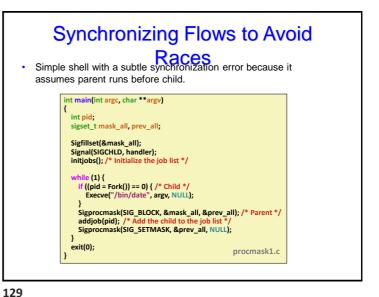


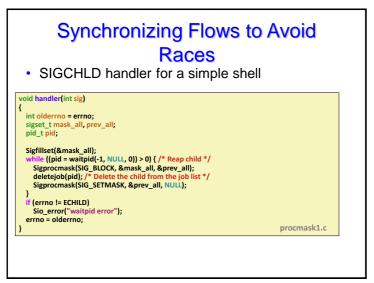

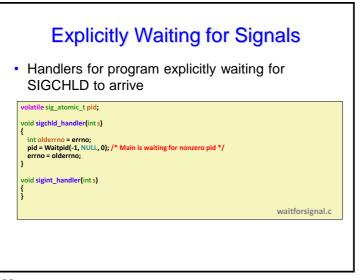


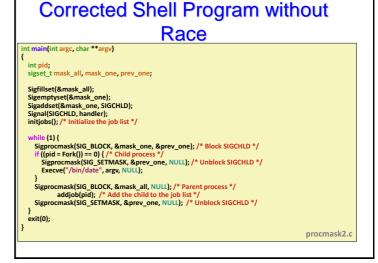

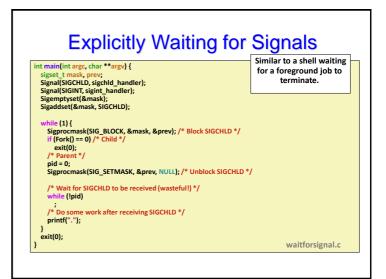

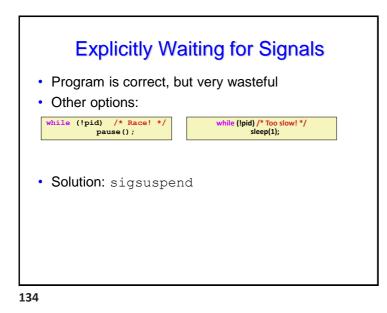

### Waiting for Signals with sigsuspend int main(int argc, char \*\*argv) { sigset\_t mask, prev; Signal(SIGCHLD, sigchld handler); Signal (SIGINT, sigint\_handler); Sigemptyset(&mask); Sigaddset(&mask, SIGCHLD); while (1) { Sigprocmask (SIG BLOCK, &mask, &prev); /\* Block SIGCHLD \*/ if (Fork() == 0) /\* Child \*/ exit(0); /\* Wait for SIGCHLD to be received \*/ pid = 0;while (!pid) Sigsuspend(&prev); /\* Optionally unblock SIGCHLD \*/ Sigprocmask (SIG SETMASK, &prev, NULL); /\* Do some work after receiving SIGCHLD \*/ printf("."); exit(0); sigsuspend.c

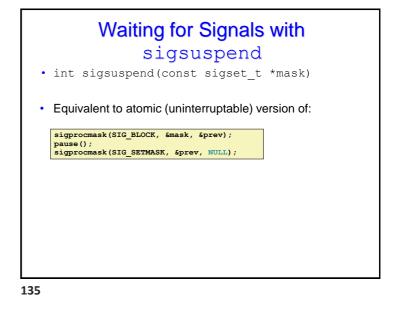

### Summary

- Signals provide process-level exception
   handling
  - Can generate from user programs
  - Can define effect by declaring signal handler
  - Be very careful when writing signal handlers
- Nonlocal jumps provide exceptional control flow within process
  - Within constraints of stack discipline