





CSC 257/457 - Fall 2009

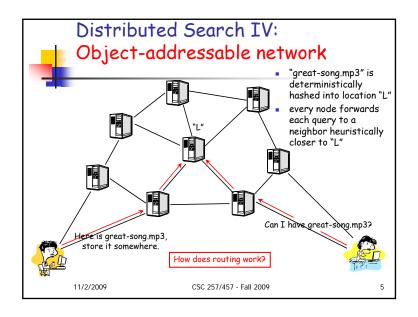

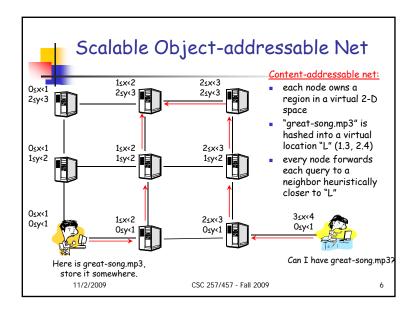

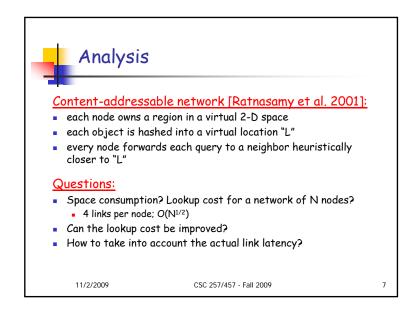

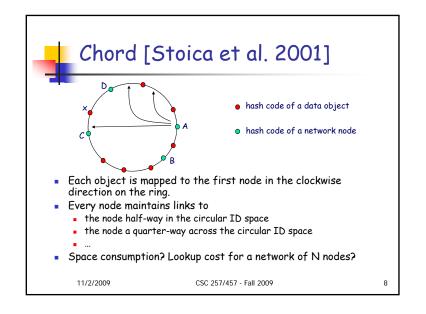

CSC 257/457 - Fall 2009



Distributed Hashtables

- Content-addressable network (CAN) [Ratnasamy et al. 2001] and Chord [Stoica et al. 2001] are also called scalable distributed hash tables (DHTs)
- There are other scalable DHT protocols.

11/2/2009

CSC 257/457 - Fall 2009

Q



Peer-to-peer Networks

- Peer-to-peer networks: distributed systems of no hierarchy - each node is a peer of any other in terms of equal functionality
 - DNS? Napster? Gnutella? Random walk? DHTs (CAN and Chord)?
- Fundamental advantage of p2p networks
 - better scalability?
 - no performance bottleneck
 - better robustness?
 - more tolerant to intentional attacks; better worst-case scenario under random failures

11/2/2009 CSC 257/457 - Fall 2009 10



More on Scalability & Robustness

- Scalability: able to support large number of nodes
 - cost of each operation is below linear-scaling goes up slowly when the system size increases: O(n) is terrible, O(n^{1/2}) is OK, O(logn) is good.
 - space requirement at each node is below linear-scaling.
 - Gnutella? Random walk? CAN? Chord?
- Robustness: complexity of repair mechanism is a very important issue
 - Gnutella? Random walk? CAN? Chord?

11/2/2009

CSC 257/457 - Fall 2009



Where are we now?

- Four approaches for searching large, distributed systems:
 - central index
 - query flooding
 - random walk
 - hash + heuristics-based routing (DHT)
- Concept of peer-to-peer networks.
- DHT can serve as a fundamental building block for other network services
 - p2p distributed file systems
 - DNS
 - Keyword search in peer-to-peer fashion.


11/2/2009


CSC 257/457 - Fall 2009


12

CSC 257/457 - Fall 2009

11

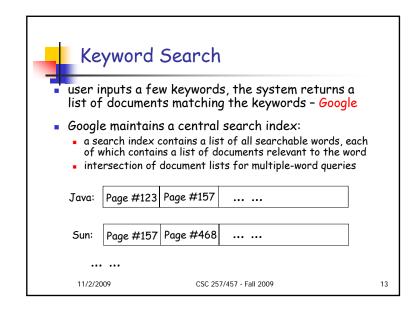

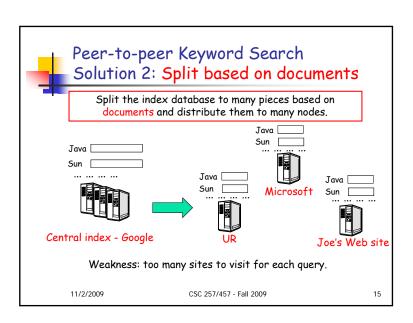

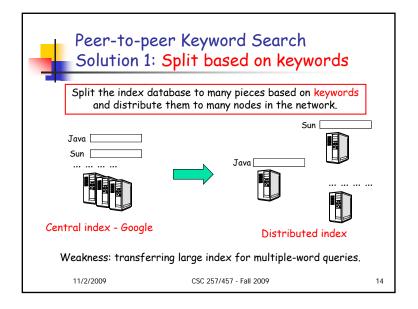

CSC 257/457 - Fall 2009 4